


LightSYS™ 2 Accessories

LightSYS™ Voice Module

Model RP432EV

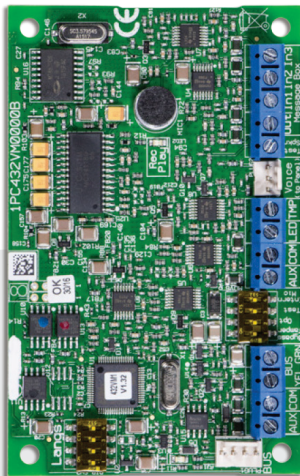

The Voice Module gives LightSYS panels the ability to verify alarms or reduce false alarms via two-way voice communication with the Central Station, for PSTN only installs. The Voice Module also add voice annunciation for zones & system state.

Power	13.8 VDC +/- 10%
Current Consumption	25 mA, typical / 160 mA, max.
Main Panel Connection	RS485, 4 Wire Bus, up to 984 ft. (300m) from Main Panel
Contacts	Open Collector, Active Pull-Down, 70 mA max.
Dimensions	105 mm x 66 mm x 18 mm (4.13" W x 2.6" H x 0.71" D)
Operating Temperature	-10°C to 55°C (14°F to 131°F)
Storage Temperature	-20°C to 60°C (-4°F to 140°F)